LONGITUDINAL SECTION 4650 FROM CL (P.S.)

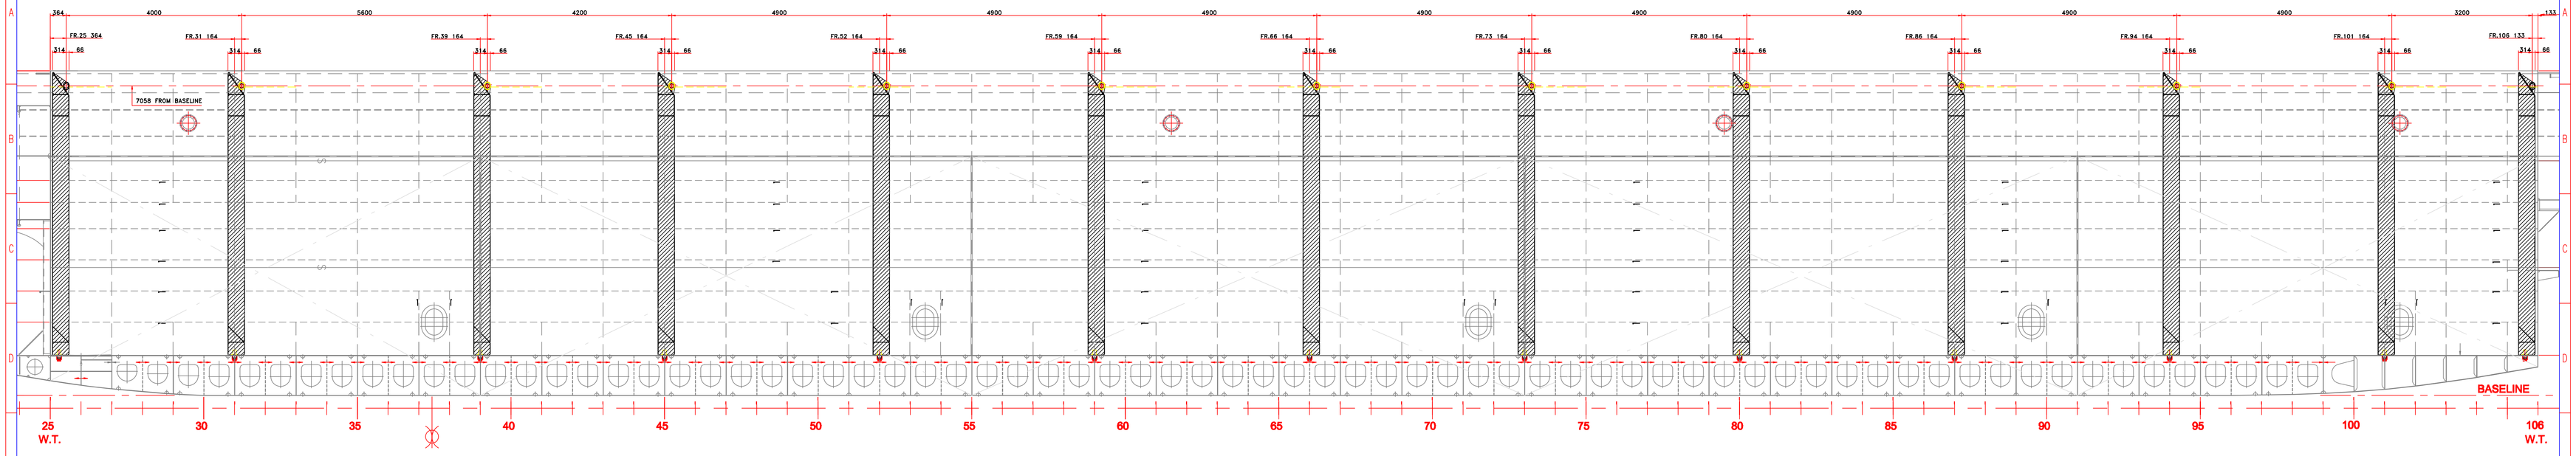

TANK TOP VIEW

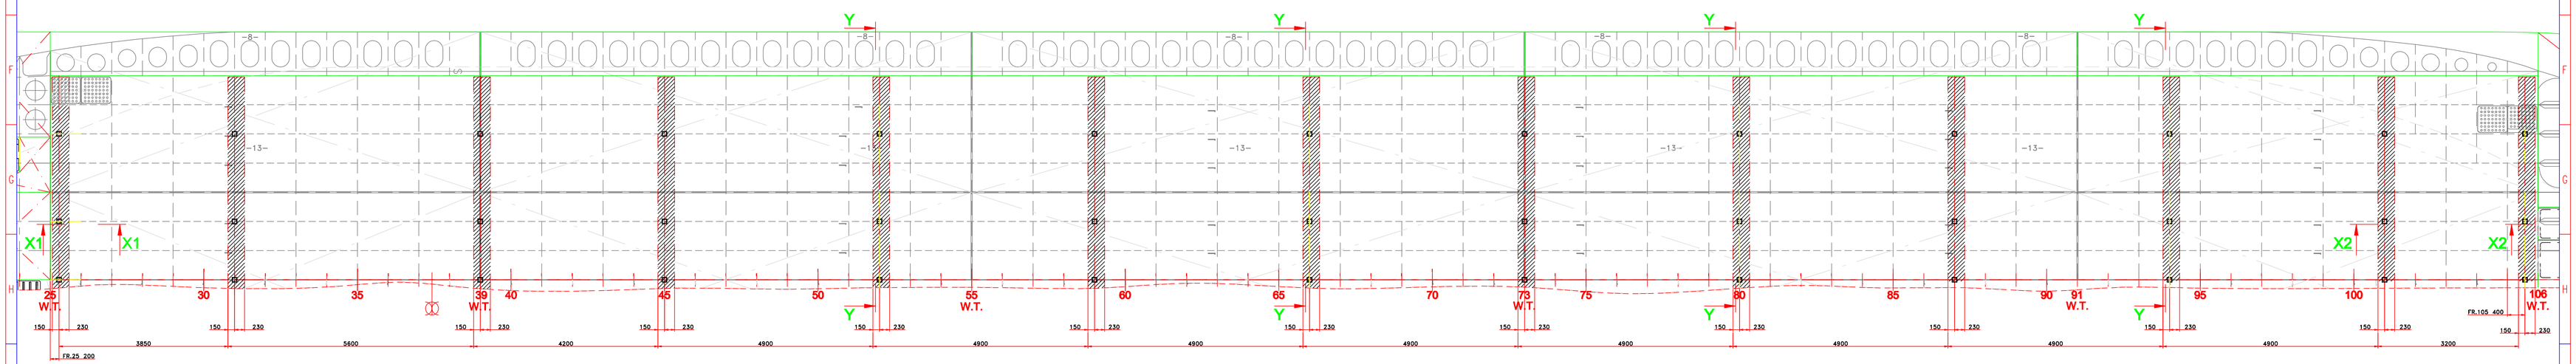

SECTION Y–Y TYPICAL FOR FR.52,66,80,94 (1:25)

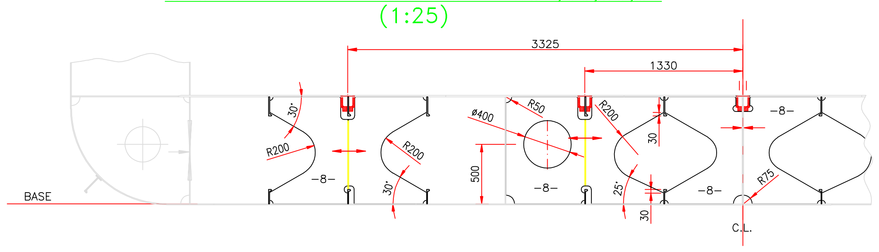

TYPICAL SECTION X1–X1 (1:25)



TYPICAL SECTION X2–X2 (1:25)

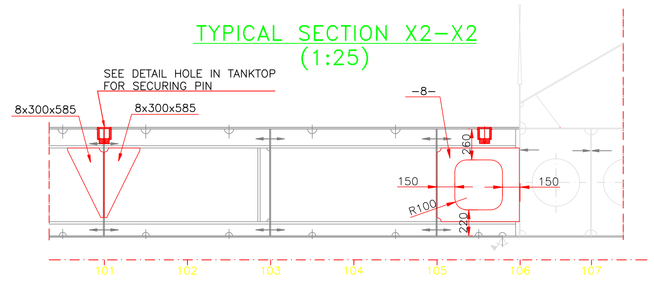

DETAIL HOLE IN COAMING FOR SECURING PIN (1:5)

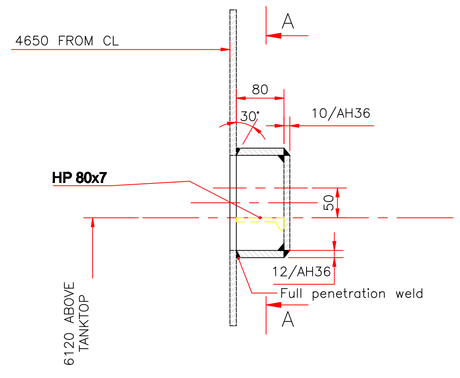

SECTION A–A

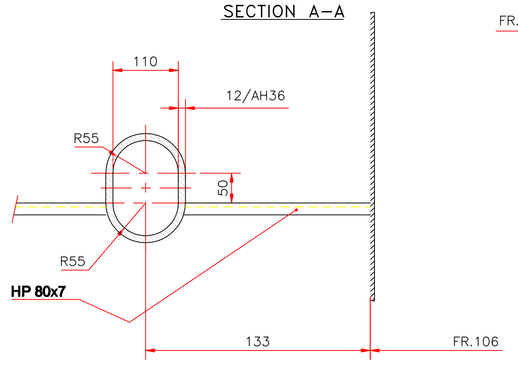

SECTION A–A

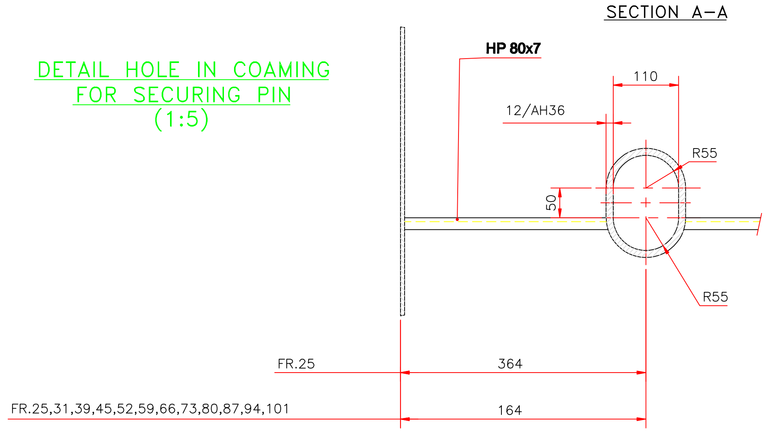

DETAIL HOLE IN TANKTOP FOR SECURING PIN (1:5)

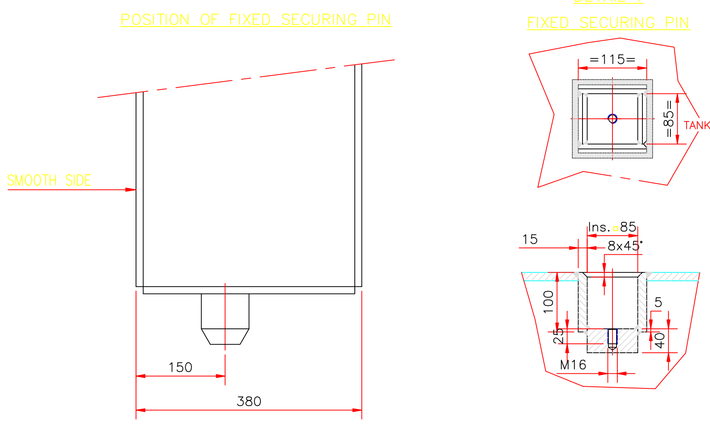

WHEN BULKHEAD IS NOT IN POSITION, HOLE TO BE FILLED WITH A POLYETHYLENE FILLING PIECE, SECURED BY A ST. ST. HEX. SOCKET HEAD CAPSCREW M16x90 159-01
FILLING PIECE CAN BE REMOVED BY USING BOLT M20!

For manhole plan see drw. 132-100
For welding details see drw. 100-203
For grainbulkheads see drw. 159-901
159-902

HEIGHT DOUBLE BOTTOM 900mm
FRAME SPACING 700mm
FRAME SPACING TRANSVERSE 665mm

NO.	DATE	DRAWN	SUBJECT
F	24-04-2006	DSB-SW	TYPICAL SECTION X1-X1, X2-X2, Y-Y ADDED
E	17-01-2006	DSB-HH	Dimensions filling piece changed
D	11-12-2007	DSB-HH	Remarks BV
C	24-03-2006	DSB-HH	Holes in tanktop for securing pins changed
B	16-09-2006	HP	BLKHDS MOVED 50mm
A	12-06-2006	BS	CHANGE DETAILS MEASUREMENTS

COPYRIGHT DAMEN SHIPYARDS GROUP

DAMEN SHIPYARDS BERGUM
Industrieterrein Zuid P.O. Box 7 9250 AA Bergum The Netherlands
phone +31 (0) 511 46 72 22 engineering@damen-bergum.nl
fax +31 (0) 511 46 42 59 www.damen-bergum.nl

DRAWN BS | FORMAT A0 | PROJECTION
CHECKED | SCALE 1:50/10/5/1
APPROVED | DATE 04-07-2006

POSITION AND DETAIL GRAIN BULKHEADS

TYPE CC2500 | DERIVED FROM DWG CC1700NV-159-900

COMP NO	SECT NO	YARD NO contractor / YARD NO building yard	DWG NO	SHEET	REVISION
			CC2500-159-900		